

LABELX[®] RM

1

Automatic labelling machine
with motorized re-winder,
proper for high speed
application.



Available with max. label width: 140 mm - 250 mm.

- Max. Speed: **up to m/min: 80(140)-50(250)**
- Max. label width: **max. 350 mm**
- Roll diameter: **400 mm**
- Approx dimensions: **900 x 600 x 350 mm**


EN

STANDARD FEATURES

Two hybrid step-motors low-loss A++ Class
Mechanical unwinder d. 400 mm
Motorized rewinder d. 350 mm
Stop photocell
End of roll alarm
Encoder in-put
Touch Screen operator panel
Offset and start delay adjustment
Automatic recovery of missing label
Applied label counter
Setting memorization



Thermal transfer printers

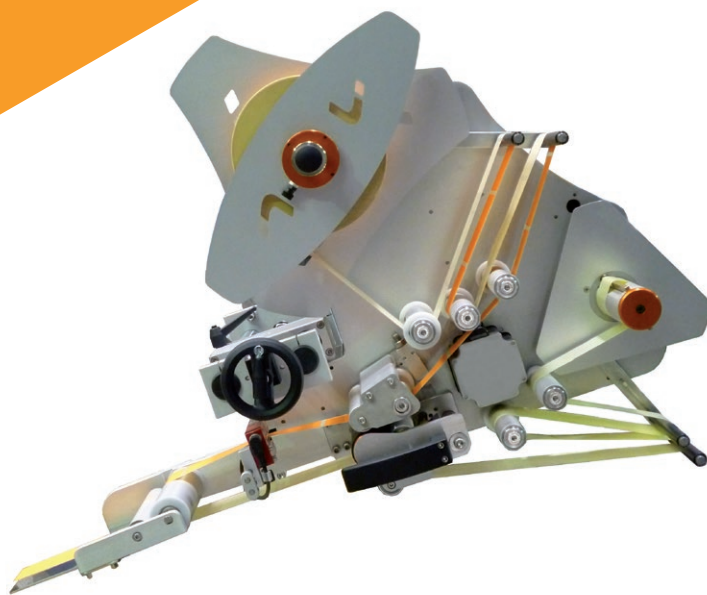

TWIN - No stop version

APPLICATIONS AREAS



OPTIONAL ACCESSORIES

Pre-end of labels roll alarm
Pre-end of full rewinder alarm
Photo-stop for transparent labels
Start photocell
Oscillating roller applicator
Hot foil coding unit
Thermal transfer printing units